

R454b Refrigerant

SUBMITTAL DATA SHEET



Series Name: Extreme Heat AHU Series
Model Number: MAUSE-H36B-2A/MO1HE-H36B-2A

Air Handler Heat Pump System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



INDOOR SPECIFICATION

ESP(inWG)	0~1.0
Indoor Air Flow (Turbo/H/M/L/Si) (CFM)	1236 / 1148 / 1059 / 971 / 971
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)	49.5/ 49.5 / 48 / 31.5 / 31.5
Dimension (W×D×H)	inch 17-1/2 x 21-1/2 x 58-1/8
	mm 445 x 546 x 1476
Package (W×D×H)	inch 20-1/2 x 31-1/8 x 62-3/8
	mm 520 x 790 x 1585
Net/Gross Weight	lbs 149 / 182
	kg 67.7 / 82.6

OUTDOOR SPECIFICATION

Compressor Type	ROTARY
Compressor Model	MTH356UKRC8FQL
Refrigerant	R454B
Refrigerant Oil Charge(mL)	1,300
Refrigerant Oil	HAF68D1A
Outdoor Air Flow (Max) (CFM)	3,002
Outdoor Noise Level (dBA)	62.5
Dimension (W×D×H)	inch 37-1/4 x 16-1/8 x 31-7/8
	mm 946 x 410 x 810
Package (W×D×H)	inch 42-7/8 x 19-5/8 x 34-7/8
	mm 1090 x 500 x 885
Net/Gross Weight	lbs 167 / 176
	kg 75.6 / 80.0

EFFICIENCY

Cooling		Heating	
SEER2	17.7	HSPF2-4	10.0
EER2	12.0	COP	3.60

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	36,000
Min/Max Capacity	14,800 ~ 41,700
Moisture Removal(L/h)	3.39
Standard Operating Range(*F/*C)	-22~122 (-30 ~ 50)
Rated Cooling Conditions:	
Indoor: 80°F DB/67°F WB	
Outdoor: 95°F DB/75°F WB	

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	36,000
2. @ 47°F Min/Max Capacity	10,700 ~ 38,400
3. @ 17°F Rated	24,600
4. @ 5°F Rated: Capacity / COP	32,600 / 2.06
5. @ 5°F Max: Capacity	32,600
Standard Operating Range(*F/*C)	-22~75 (-30 ~ 24)
1. Rated Heating Conditions:	
Indoor: 70°F DB/60°F WB	
Outdoor: 47°F DB/43°F WB	
2. Rated Heating Conditions:	
Indoor: 70°F DB/60°F WB	
Outdoor: 17°F DB/15°F WB	
3. Heating Conditions, Compressor Operating at Max. Frequency	
Indoor: 70°F DB/60°F WB	
Outdoor: 5°F DB/5°F WB	

ELECTRICAL


Indoor Power Supply	115/208/230V,60Hz,1Ph
Indoor MCA 115V/(208/230V)	8.0/6.0
Indoor MOP	15.0
Outdoor Power Supply	208/230V,60Hz,1Ph
Outdoor MCA	26.0
Outdoor MOP	30.0
Communication Wiring	AWG 20/2
Compressor RLA	18.0
Outdoor Fan Motor RLA	3.0
Outdoor Fan Motor W	120
Indoor Fan Motor RLA	4.5
Indoor Fan Motor W	600
System Power Input @ Cooling (W)	3,000 (1,180 ~ 3,930)
System Power Input @ Heating (W)	2,930 (645 ~ 3,110)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING

Throttle type(Indoor)	EXV
Throttle type(Outdoor)	EXV
Liquid Size	3/8" (9.52mm)
Gas Size	3/4" (19mm)
Max. Piping Length(ft/m)	213 (65)
Max. Height Difference(ft/m)	98 (30)
Max. Pre-charged Length(ft/m)	25 (7.5)
Refrigerant Pre-charged Amount(oz/kg)	127 (3.6)
Additional Charge of Refrigerant(oz/ft)/(g/m)	0.7 (65)
Connection Method	Flared

Indoor Unit Dimension


Unit: inch, mm

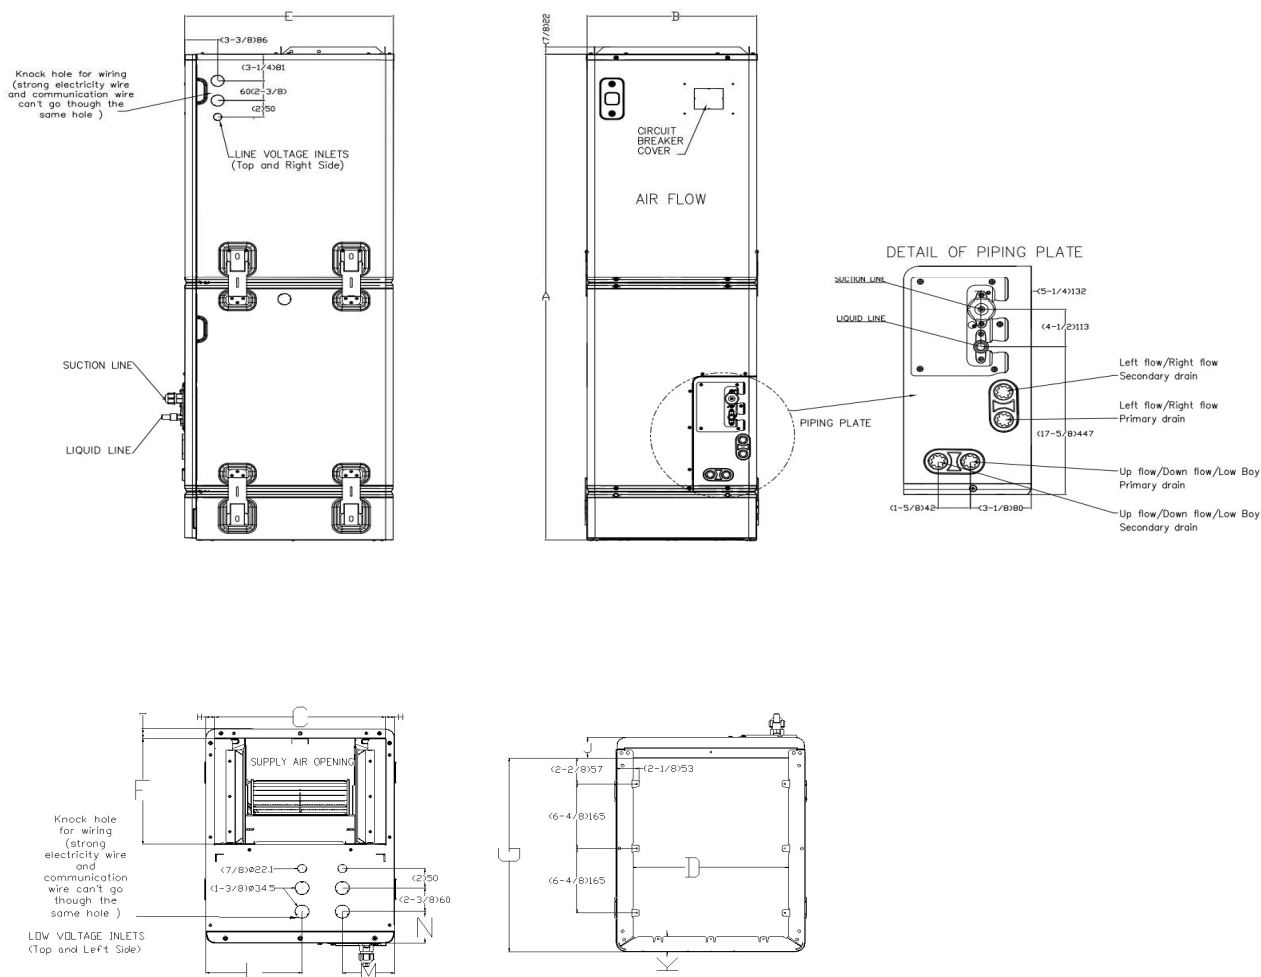


Dimensions		Model(Btu/h)		18K/24K		30K/36K		48K/54K	
				inch	mm	inch	mm	inch	mm
A	Model Height			53-7/8	1368	58-1/8	1476	60-1/8	1526
B	Model Width			14-4/8	368	17-4/8	445	21-4/8	546
C	Supply Air Opening Width			12-7/8	328	16	405	19-7/8	506
D	Return Air Opening Width			11-1/8	282	14-4/8	368	18-4/8	470
E	Model Depth			21-1/2	546	21-1/2	546	21-1/2	546
F	Supply Air Opening Depth			10-5/8	271	10-5/8	271	10-5/8	271
G	Return Air Opening Depth			19	484	19	484	19	484
H	Supply Air Opening Clearance			7/8	22	7/8	22	7/8	22
I	Supply Air Opening Clearance			1	24	1	24	1	24
J	Return Air Opening Front Clearance			2-4/8	62	2-4/8	62	2-4/8	62
K	Return Air Opening Back Clearance			1-4/8	37	1-4/8	37	1-4/8	37
L	Top cover knock hole			/	/	9	229	10-7/8	275
M	Top cover knock hole			4-1/2	113	4-7/8	124	5-1/8	131
N	Top cover knock hole			2	51	2	51	1-5/8	41

Outdoor Unit Dimension


Unit: inch (mm)

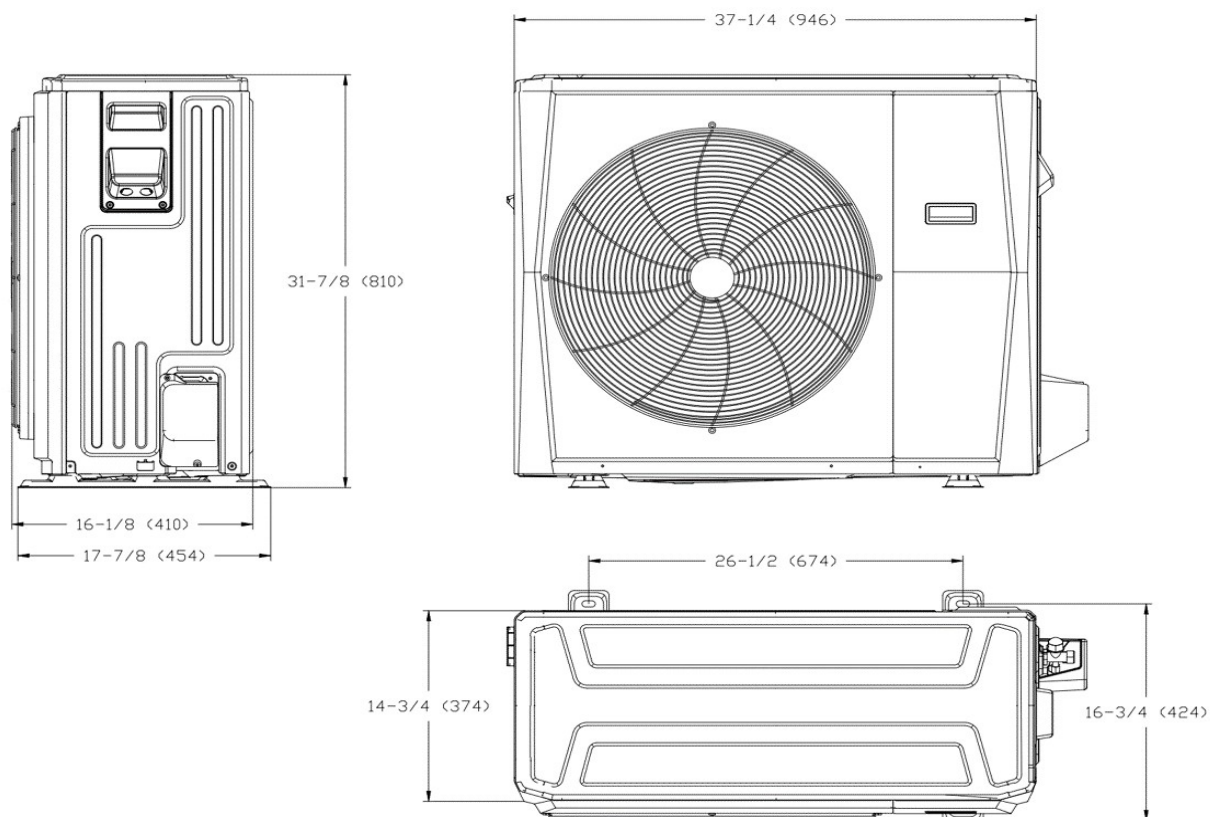

Installation Instruction For Outdoor Unit

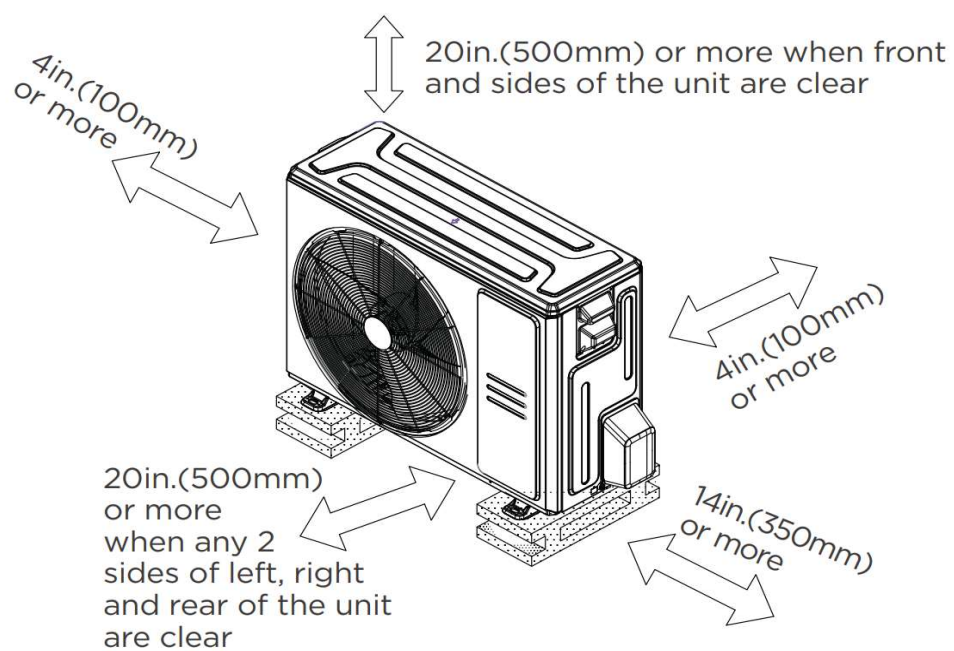

Fan Performance For Indoor Unit

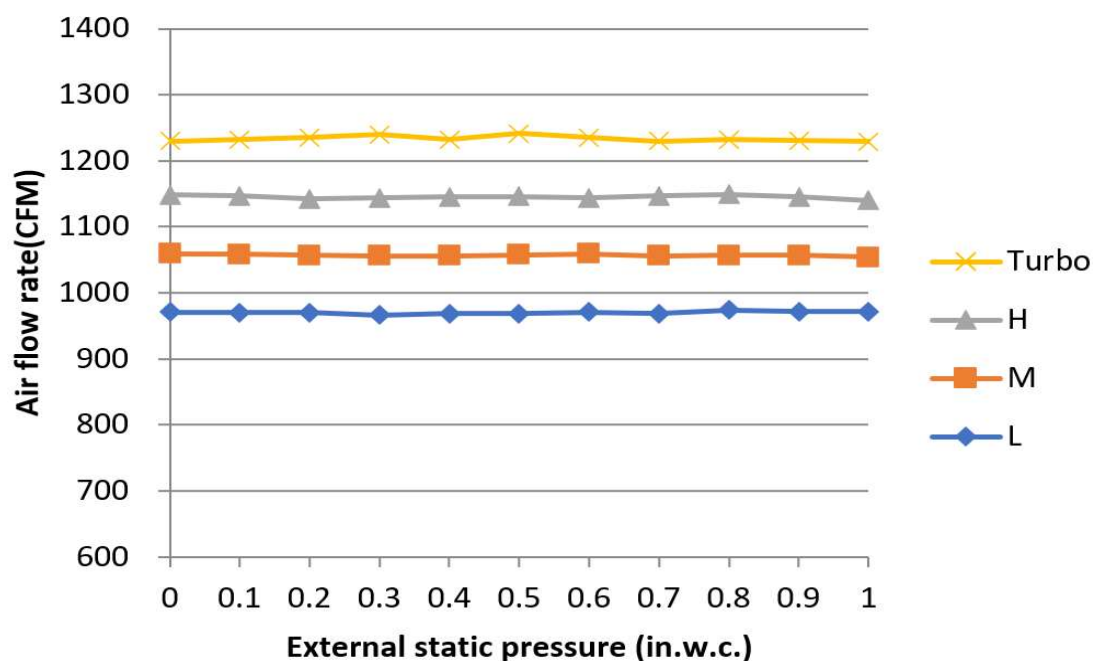

Features

- Multi-position installation: horizontal(left or right), vertical(up or down)
- The IDU supports 115/230V voltage compatibility
- Aluminum Coil
- Constant Air Flow system: Up to 1.0 In.W.C.
- Optional Auxiliary heat kit up to 25kW
- Easy Maintenance
- Multiple control options available:
 - Two-way communication wired controller with built-in Wi-Fi: 120N (X6W)
 - Wireless remote controller
 - Third-Party 24V Thermostat
- Adaptive Control System
- High efficiency up to 19 SEER2, 12.5 EER2, 10.8 HSPF2
- 100% heating output down to -13°F*
- Base pan heater and crankcase heater are equipped as standard

* When MAUSE-H36B-2A is paired with MO1SE-H36B-2A, its rated heating capacity at -13°F is 100%