

# SUBMITTAL DATA SHEET



Series Name: Console Xtreme Heat Series  
 Model Number: MFAHU-H16B-2A/MO1HS-H18B-2A

## Console Heat Pump System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



## INDOOR SPEINDOOR SPECIFICATIONCIFICATION

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)	500 / 441 / 383 / 324 / 206	
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)	47 / 43.5 / 40.5 / 30.5 / 25.5	
Dimension (W×D×H)	inch	31-1/4 x 7-7/8 x 24-1/2
	mm	794 × 200 × 621
Package (W×D×H)	inch	34 x 11 x 28-1/4
	mm	865 × 280 × 719
Net/Gross Weight	lbs	33 / 42
	kg	14.9 / 19.0

## OUTDOOR SPECIFICATION

Compressor Type	ROTARY	
Compressor Model	KTM240D46UKT2	
Refrigerant	R454B	
Refrigerant Oil Charge(mL)	620	
Refrigerant Oil	VG74	
Outdoor Air Flow (Max) (CFM)	1,766	
Outdoor Noise Level (dBA)	59	
Dimension (W×D×H)	inch	35 x 13-1/2 x 26-1/2
	mm	890 × 342 × 673
Package (W×D×H)	inch	39-1/8 x 15-5/8 x 29-1/8
	mm	995 × 398 × 740
Net/Gross Weight	lbs	100 / 108
	kg	45.3 / 48.9

## EFFICIENCY

Cooling		Heating	
SEER2	20	HSPF2-4	10.3
EER2	12.5	COP	2.85

## PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	16,000
Min/Max Capacity	6,500~17,200
Moisture Removal(L/h)	2.18
Standard Operating Range(*F/°C)	-22~122 (-30~50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

## PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	17,000
1. @ 47°F Min/Max Capacity	6,500~20,000
2. @ 17°F Rated	14,200
3. @ 5°F Rated: Capacity / COP	17,500 / 1.95
3. @ 5°F Max: Capacity	17,500
Standard Operating Range(*F/°C)	-22~75 (-30~24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB

## ELECTRICAL


Power Supply	208 / 230 V,60 Hz,1 Ph	
System MCA	19.0	
Connection Wiring	AWG 14/4	
System MOCP	20.0	
Compressor RLA	11.7	
Outdoor Fan Motor RLA	0.9	
Outdoor Fan Motor W	80	
Indoor Fan Motor RLA	1	
Indoor Fan Motor W	13	
System Power Input @ Cooling (W)	1,280 (620~1,600)	
System Power Input @ Heating (W)	1,750 (460~1,880)	
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)	
RLA: Rated load amps (A)	W: Fan motor rated output (W)	

## PIPING


Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV+Throttle valve
Liquid Size	1/4" (6.35 mm)
Gas Size	1/2" (12.7 mm)
Max. Piping Length(ft/m)	98 (30)
Max. Height Difference(ft/m)	66 (20)
Max. Pre-charged Length(ft/m)	25 (7.5)
Refrigerant Pre-charged Amount(oz/kg)	55 (1.57)
Additional Charge of Refrigerant((oz/ft)/(g/m)	0.16 (15)
Connection Method	Flared

### Indoor Unit Dimension

Unit: inch (mm)

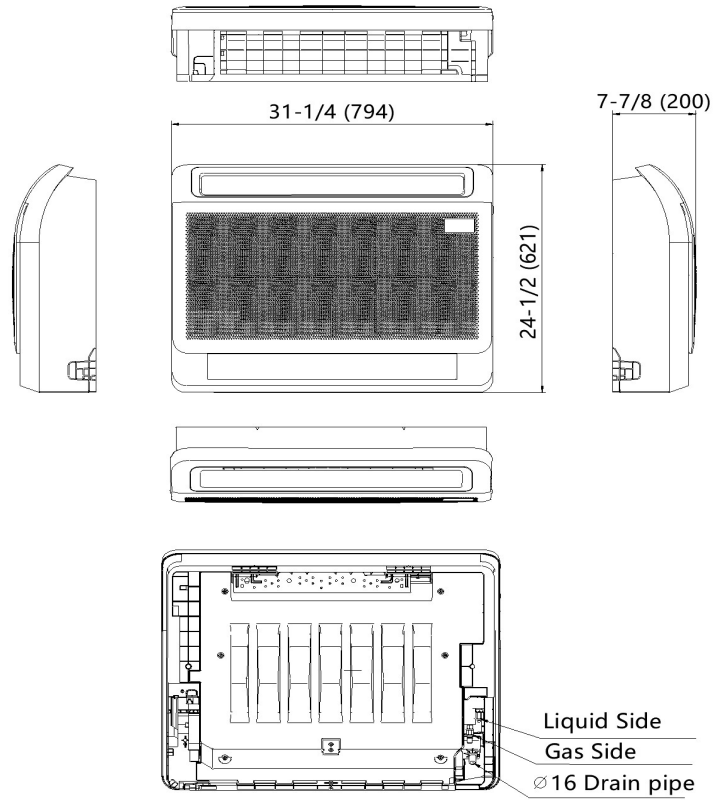


### Installation Instruction

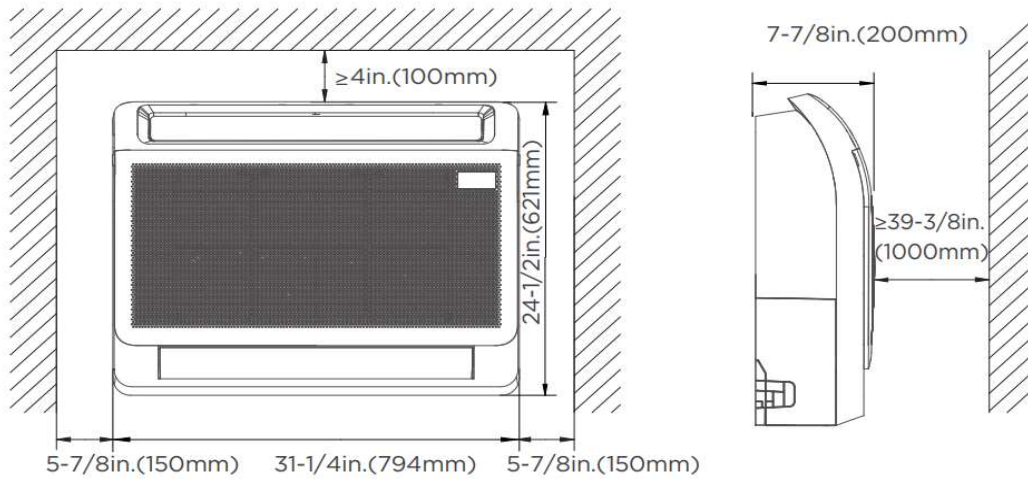


### Outdoor Unit Dimension

Unit: inch (mm)

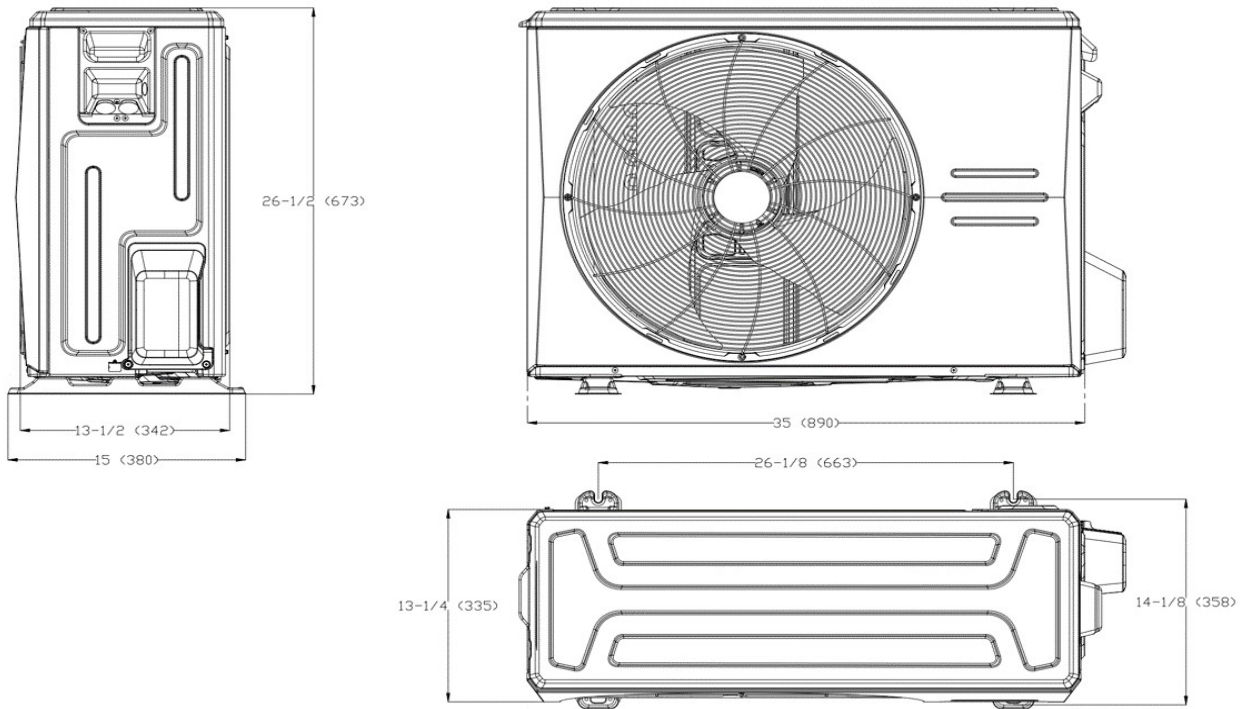

### Installation Instruction

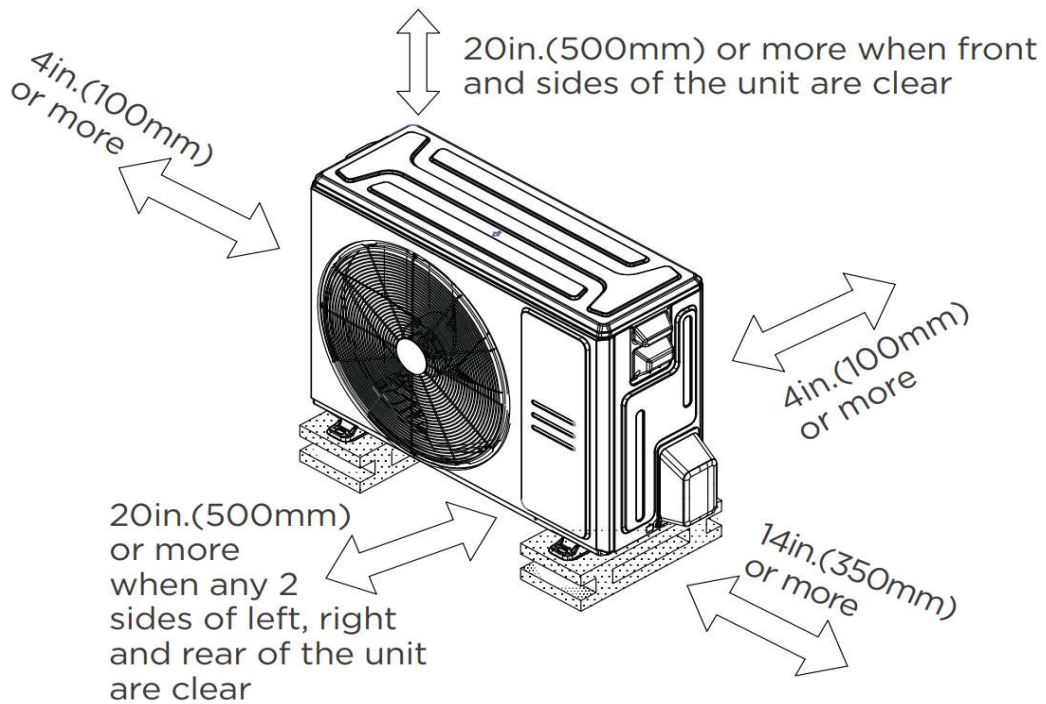

## FEATURES

- Compact Design
- Dual Air Outlets
- Refrigerant leakage detection sensor
- Humidity sensor
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in Wi-Fi
- OTA(by using WiFi dongle)
- Multiple control options available:
  - Two-way communication wired controller with built-in Wi-Fi:120N(X6W)
  - Wireless remote controller
  - Third-Party 24V Thermostat\*

\*24V interface is required.