

R454b Refrigerant

SUBMITTAL DATA SHEET



Series Name: Mid Tier - All Easy Pro Advanced Heat Series
Model Number: MSEEU-H36B-2A/MO1BS-H36B-2A

High Wall Mini Split Heat Pump System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



INDOOR SPECIFICATION

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)	883 / 636 / 506 / 383 / 324
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)	49 / 49 / 43.5 / 34.5 / 31.5
Dimension (W×D×H)	inch 44-7/8 x 10-7/8 x 14-1/2
	mm 1,140 x 275 x 370
Package (W×D×H)	inch 50-3/8 x 14-1/8 x 17-7/8
	mm 1,280 x 360 x 455
Net/Gross Weight	lbs 43 / 55
	kg 19.6 / 24.8

OUTDOOR SPECIFICATION

Compressor Type	TWIN-ROTARY
Compressor Model	KTF250D22UMT
Refrigerant	R454B
Refrigerant Oil Charge(mL)	670
Refrigerant Oil	VG74
Outdoor Air Flow (Max) (CFM)	2,235
Outdoor Noise Level (dBA)	63
Dimension (W×D×H)	inch 37-1/4 x 16-1/8 x 31-7/8
	mm 946 x 410 x 810
Package (W×D×H)	inch 42-7/8 x 19-5/8 x 34-7/8
	mm 1,090 x 500 x 885
Net/Gross Weight	lbs 150 / 160
	kg 68.2 / 72.7

EFFICIENCY

Cooling		Heating	
SEER2	19.0	HSPF2-4	8.5
EER2	8.6	COP	2.85

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	36,000
Min/Max Capacity	6,600~36,800
Moisture Removal(L/h)	4.6
Standard Operating Range(*F/*C)	-13~122 (-25 ~ 50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	36,000
1. @ 47°F Min/Max Capacity	11,400~44,000
2. @ 17°F Rated	24,200
3. @ 5°F Rated: Capacity / COP	22,000/1.90
3. @ 5°F Max: Capacity	22,000
Standard Operating Range(*F/*C)	-13~75 (-25 ~ 24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB


ELECTRICAL

Power Supply	208/230V,60Hz,1Ph
System MCA	33.0
Connection Wiring	AWG 14/4
System MOCP	35.0
Compressor RLA	21.5
Outdoor Fan Motor RLA	1.3
Outdoor Fan Motor W	120
Indoor Fan Motor RLA	1.0
Indoor Fan Motor W	58
System Power Input @ Cooling (W)	4,190 (740 ~ 4,400)
System Power Input @ Heating (W)	3,710 (1,020 ~4,790)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING


Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV+Throttle valve
Liquid Size	3/8" (9.52mm)
Gas Size	5/8" (15.9mm)
Max. Piping Length(ft/m)	213 (65)
Max. Height Difference(ft/m)	98 (30)
Max. Pre-charged Length(ft/m)	25 (7.5)
Refrigerant Pre-charged Amount(oz/g)	113 (3.2)
Additional Charge of Refrigerant((oz/ft)/(g/m)	0.32 (30)
Connection Method	Flared

Indoor Unit Dimension

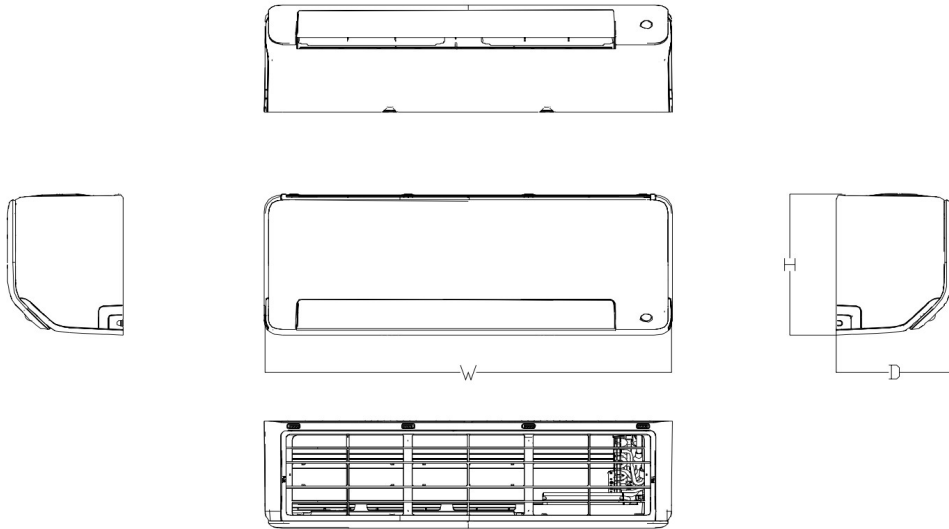

Capacity	Body Code	Unit	W	D	H
9k-15K	B	mm	795	225	295
		inch	31-3/8	8-7/8	11-5/8
18K	C	mm	965	239	319
		inch	38	9-3/8	12-1/2
24k-36K	D	mm	1140	275	370
		inch	44-7/8	10-7/8	14-1/2


Installation Instruction

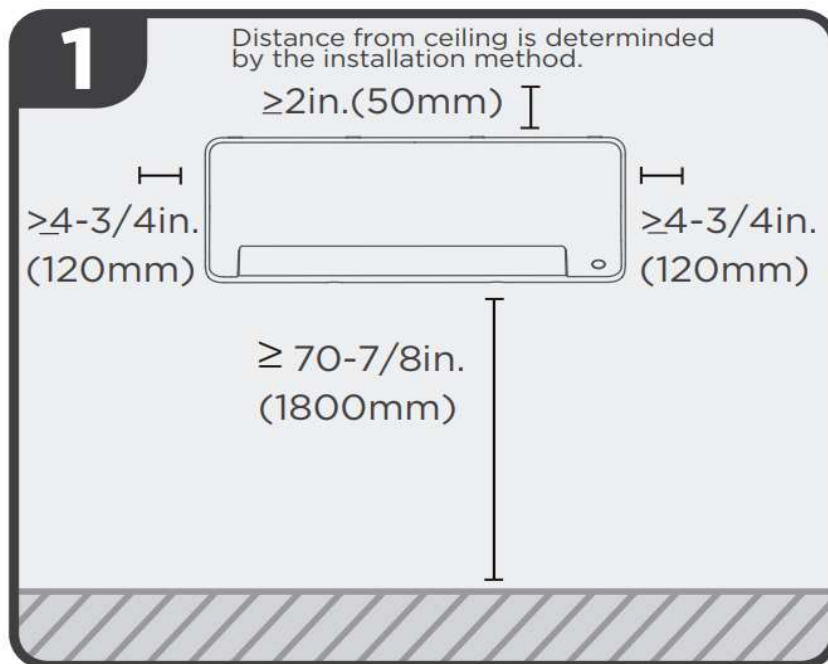


Select Installation Location

Outdoor Unit Dimension

Unit: inch (mm)

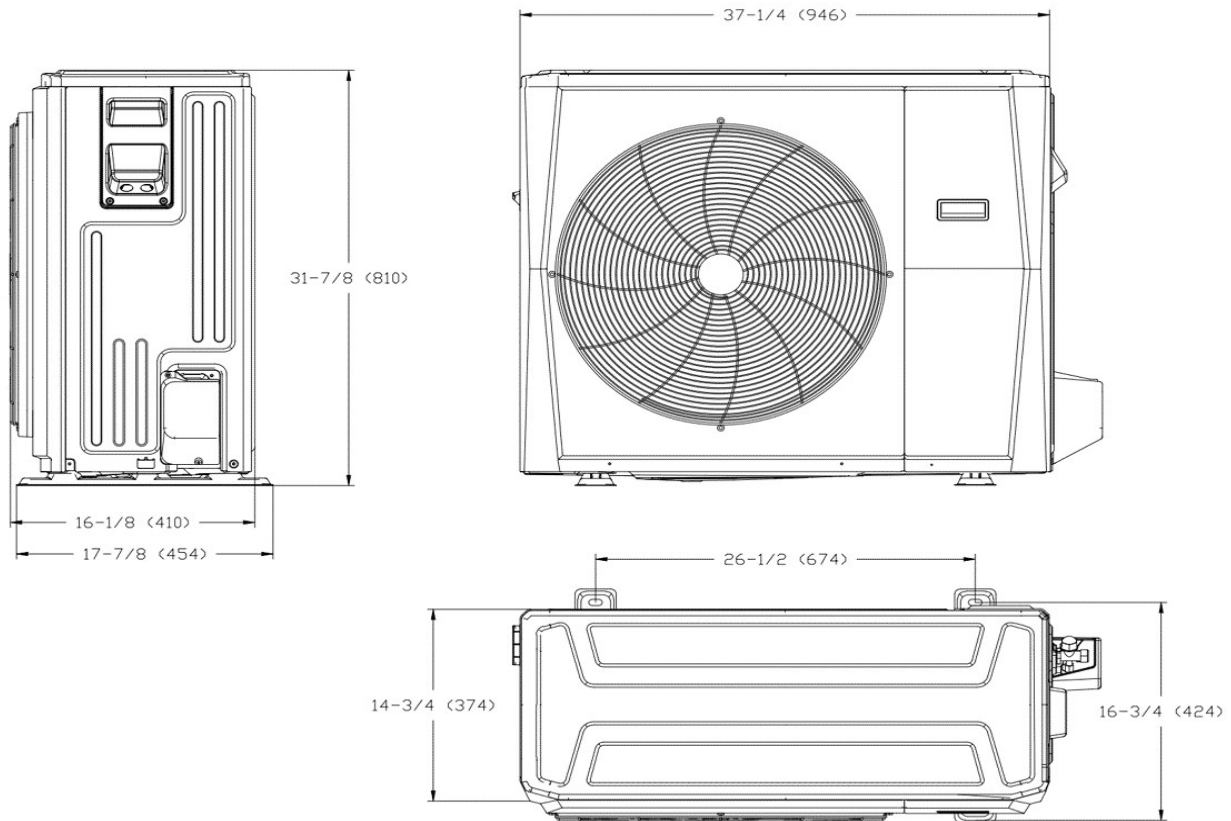

Installation Instruction

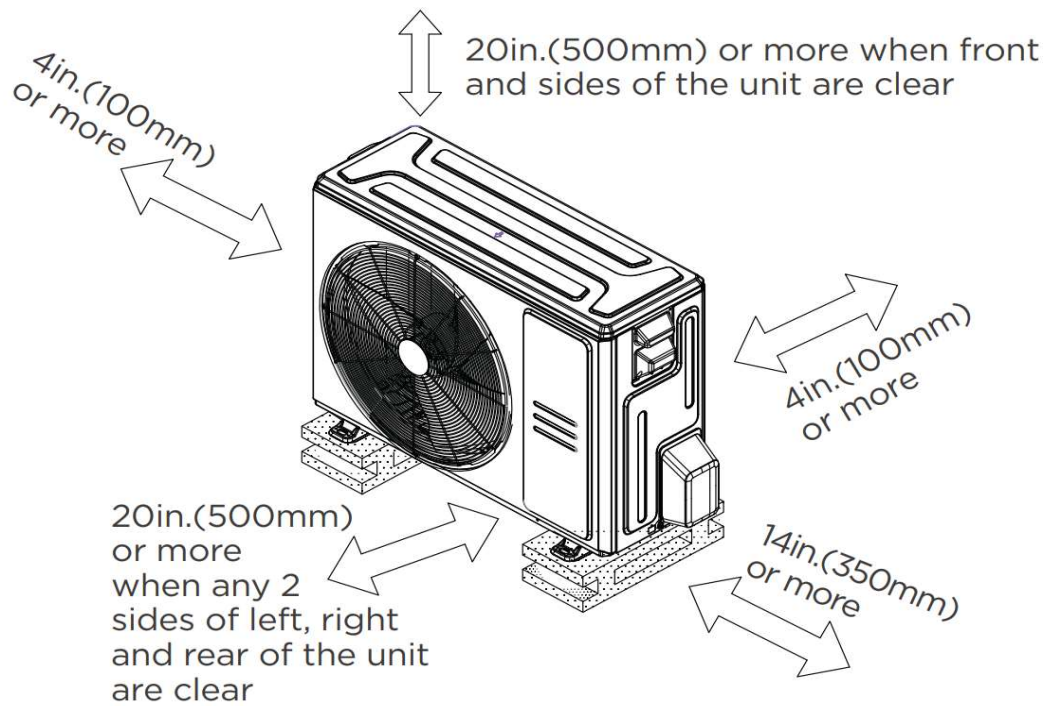

FEATURES

- Intelligent eye
- Easy maintenance design
- Indoor unit TU1 copper coil
- Humidity control
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA(by using WiFi dongle)
- Multiple control options available:
 - Wireless remote controller RG10 (Built-In)
 - Two-way communication wired controller with built-in Wi-Fi:120N(X6W)
 - Midea Smart Thermostat: MTL04-1
 - Third-Party 24V Thermostat*

*Midea 24V Mini Interface Kit (17222000A68532) is required.